


I.W.T. 規格 O型リング (穴用)

I.W.T. Standard Internal Ring O-type




イワタ RING
磐田 電工

自由状態



使用状態

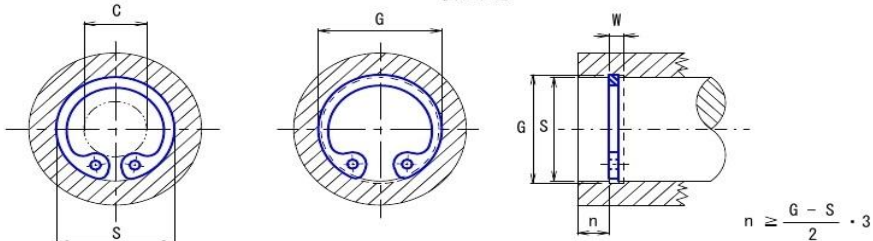

単位 mm

呼び Ring No.	穴径 Housing dia S	リング寸法 I.W.T. RING DIMENSIONS					溝寸法 GROOVE DIMENSIONS					挿入直径 When sprung into housing C
		外径 Outside dia		板厚 Thickness		孔径 Hole dia	溝径 Groove dia		溝巾 Groove width			
		D1	公差	t	公差	d	G	公差	W	公差		
★O-6	6	6.5	+0.12	0.40	±0.03	0.8	6.4	±0.05	0.45	+0.05 -0	2.7	
★O-7	7	7.5	-0.05	0.40		0.8	7.4		0.45		3.7	
★O-8	8	8.7	0.40	0.40		0.8	8.5		0.45		4.3	
O-9	9	9.7	+0.25 -0.12	0.40	±0.05	0.8	9.6	±0.07	0.45	+0.08 -0	4.9	
O-10	10	10.8		0.65		1.0	10.6		0.73		5.4	
O-11	11	11.8		0.65		1.0	11.7		0.73		5.6	
O-12	12	12.7	0.65	1.2	12.5	0.73	6.5					
O-13	13	13.9	0.90	1.2	13.6	1.00	6.9					
O-14	14	15.2	0.90	1.2	14.8	1.00	7.0					
O-15	15	16.2	0.90	1.2	15.8	1.00	8.0					
O-16	16	17.3	+0.35 -0.25	0.90	±0.05	1.6	16.9	±0.10	1.00	+0.10 -0	8.9	
O-17	17	18.3		0.90		1.6	18.0		1.00		9.9	
O-18	18	19.5		0.90		1.6	19.0		1.00		10.9	
O-19	19	20.5	0.90	1.6	20.0	1.00	11.5					
O-20	20	21.6	1.00	1.6	21.1	1.10	12.2					
O-21	21	22.7	+0.50 -0.30	1.00	±0.07	1.6	22.2	±0.12	1.10	+0.10 -0	12.9	
O-22	22	23.7		1.00		1.6	23.2		1.10		13.7	
O-23	23	24.7		1.00		1.6	24.2		1.10		14.7	
O-24	24	25.7	1.00	1.6	25.3	1.10	15.7					
O-26	26	28.2	1.00	1.6	27.4	1.10	17.8					
O-28	28	30.2	+0.70 -0.50	1.40	±0.07	2.0	29.5	±0.15	1.55	+0.10 -0	18.5	
O-30	30	32.4		1.40		2.0	31.7		1.55		20.7	
O-32	32	34.5		1.40		2.0	33.8		1.55		22.4	
O-35	35	37.7	1.40	2.0	36.9	1.55	25.4					
O-37	37	39.9	1.40	2.0	39.0	1.55	27.4					
O-40	40	43.2	+0.70 -0.50	1.60	±0.07	2.0	42.2	±0.15	1.76	+0.10 -0	28.9	
O-42	42	45.4		1.60		2.0	44.3		1.76		30.3	
O-45	45	48.4		1.60		2.6	47.5		1.76		33.1	
O-47	47	50.6	1.60	2.4	49.7	1.76	34.6					
O-50	50	53.8	1.60	2.4	52.8	1.76	37.6					
O-52	52	56.0	+0.70 -0.50	1.60	±0.07	2.4	54.8	±0.15	1.76	+0.10 -0	38.8	
O-55	55	59.2		2.00		2.5	58.1		2.20		41.6	
O-58	58	62.5		2.00		2.4	61.3		2.20		43.7	
O-62	62	66.9	2.00	2.8	65.4	2.20	47.3					
(O-65)	65	69.3	+0.70 -0.50	2.30	±0.07	2.8	68.6	±0.15	2.56	+0.10 -0	50.1	
O-68	68	73.3		2.30		2.8	71.8		2.56		52.3	
O-72	72	77.9		2.30		2.8	76.0		2.56		56.2	
O-75	75	81.2	2.30	2.8	79.2	2.56	58.7					
O-80	80	86.6	+0.70 -0.50	2.90	±0.07	2.8	84.4	±0.15	3.20	+0.10 -0	63.3	
O-85	85	91.7		2.90		3.2	89.5		3.20		66.8	
O-90	90	97.4		2.90		3.2	95.0		3.20		71.5	
O-95	95	102.8	2.90	3.2	100.4	3.20	76.1					
O-100	100	109.0	2.90	3.2	105.6	3.20	80.7					
O-115	115	125.3	2.90	3.2	121.3	3.20	93.9					
O-120	120	130.8	2.90	3.8	126.5	3.20	98.2					
O-130	130	141.6	2.90	4.0	137.2	3.20	106.4					
O-135	135	145.9	3.20	4.0	142.5	3.56	110.5					

標準材質は、SK85M又はSK85(黒染め)です。その他は受注生産となります。

(注) ★印は、ステンレス製品(SUS304)もお取扱いございます。

(注) (O-65)は、受注生産となります。