


I.W.T. 規格 OV型リング (穴用)

I.W.T. Internal Ring OV-type



イワタ RING
磐田電工

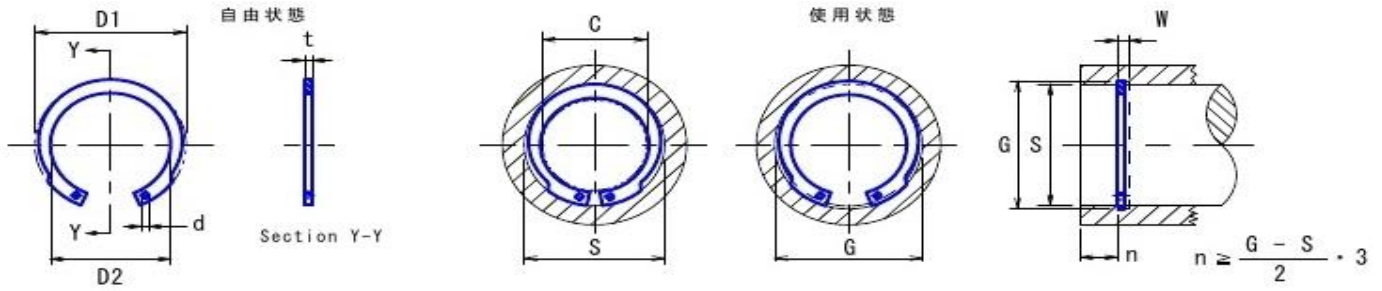

単位 mm

呼び Ring No.	穴径 Housing dia S	リング寸法 I.W.T. RING DIMENSIONS					溝寸法 GROOVE DIMENSIONS					挿入直径 When sprung into housing C
		外径 Outside dia		内径 Inside dia		板厚 Thickness	孔径 Hole dia	溝径 Groove dia		溝巾 Groove width		
		D1	公差	D2	t	公差	d	G	公差	W	公差	
OV-15	15	16.10	+0.15	12.60	1.00	±0.05	0.9	15.8	+0.10 -0	1.10	+0.08 -0	11.0
OV-16	16	17.30	-0.10	13.10	1.00		1.3	16.8		1.10		11.5
OV-17	17	18.30	+0.20 -0.12	14.10	1.00		1.3	17.8		1.10		12.5
OV-18	18	19.50		15.10	1.00		1.2	19.0	1.10	13.3		
★OV-19	19	20.50	16.10	1.00	1.3		20.0	1.10	14.3			
OV-20	20	21.50	±0.20	16.90	1.00		1.3	21.0	+0.15 -0	1.10		15.1
OV-21	21	22.50		17.80	1.00		1.3	22.0		1.10		16.0
OV-22	22	23.50		18.70	1.00		1.3	23.0		1.10		16.9
★OV-24	24	25.90		20.30	1.20		1.5	25.2	+0.20 -0	1.30		18.1
OV-25	25	26.90		21.30	1.20		1.5	26.2		1.30		19.1
★OV-26	26	27.90	21.90	1.20	1.5	27.2	1.30	19.7				
OV-28	28	30.10	23.90	1.20	1.5	29.4	1.30	21.3				
OV-30	30	32.10	25.70	1.20	1.5	31.4	1.30	23.1				
OV-32	32	34.40	27.80	1.20	1.5	33.7	1.30	24.9				
OV-35	35	37.80	±0.25	31.00	1.50	±0.07	1.7	37.0	+0.25 -0	1.60	+0.10 -0	27.7
OV-36	36	38.80		31.60	1.50		1.7	38.0		1.60		28.3
OV-38	38	40.80		33.20	1.50		1.7	40.0		1.60		29.9
OV-40	40	43.50		35.50	1.75		2.0	42.5	1.85	31.2		
OV-42	42	45.50		37.10	1.75		2.0	44.5	1.85	32.8		
OV-45	45	48.50	±0.38	39.70	1.75		2.0	47.5	+0.30 -0	1.85		35.4
OV-47	47	50.50		41.30	1.75		2.0	49.5		1.85		37.0
OV-50	50	54.20		44.20	2.00		2.5	53.0		2.15		38.8
OV-52	52	56.20		46.20	2.00		2.5	55.0	2.15	40.8		
OV-55	55	59.20		48.80	2.00		2.5	58.0	2.15	43.4		
OV-60	60	64.20	±0.45	53.40	2.00	2.5	63.0	+0.12 -0	2.15	48.0		
OV-62	62	66.20		55.40	2.00	2.5	65.0		2.15	50.0		
OV-80	80	85.50		73.10	2.50	2.5	83.5		+0.35 -0	2.65	65.6	
OV-85	85	90.50		77.50	3.00	3.0	88.5			3.15	70.0	

標準材質は、SK85M又はSK85(黒染め)です。その他は受注生産となります。

(注) ★印は、ステンレス製品(SUS304)もお取り扱いございます。