


I.W.T. 規格 CE型リング (軸用)

I.W.T. Standard External Ring CE-type



イワタ RING
磐田 電工

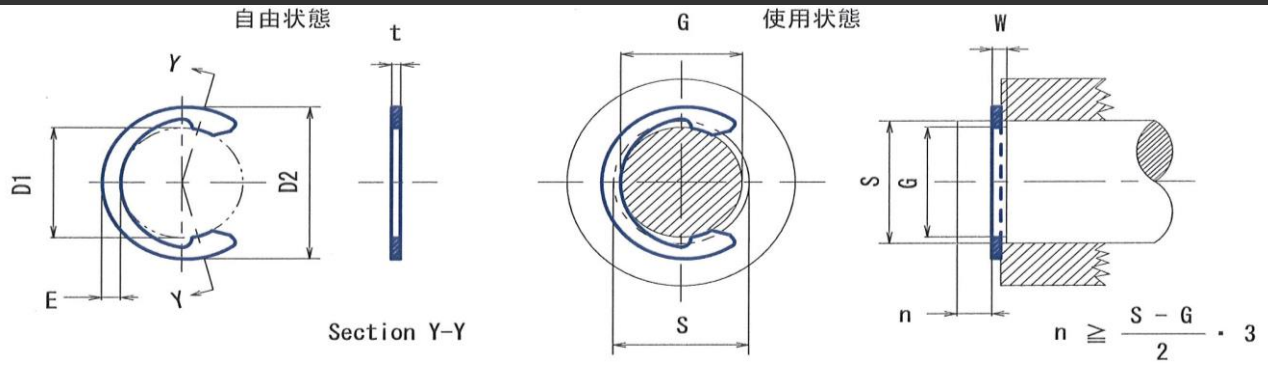

単位 mm

呼び Ring No.	軸径 Shaft dia S	リング寸法 I.W.T. RING DIMENSIONS						溝寸法 GROOVE DIMENSIONS					
		内径 Inside dia		外径 Outside dia		板厚 Thickness		最大巾 Ring Width		溝径 Groove dia		溝巾 Groove width	
		D1	公差	D2	t	公差	E	G	公差	W	公差		
★CE-3 ※	3	2.41		4.45	0.40		0.80	2.48		0.45			
★CE-4 ※	4	3.31	+0.05 -0.10	5.52	0.40	±0.03	0.83	3.43	±0.03	0.45	+0.05 -0		
★CE-5 ※	5	4.20		6.65	0.40		1.03	4.37		0.45			
★CE-6 ※	6	5.09		7.72	0.65		1.15	5.30		0.73			
★CE-7 ※	7	5.98		8.90	0.65		1.25	6.21		0.73			
★CE-8 ※	8	6.87		10.00	0.65		1.34	7.13		0.73			
★CE-9	9	7.77	+0.07 -0.12	11.12	0.65	±0.04	1.43	8.05	±0.05	0.73			
★CE-10	10	8.66		12.30	0.65		1.53	8.97		0.73			
★CE-11	11	9.55		13.42	0.65		1.62	9.88		0.73			
★CE-12	12	10.45		14.54	0.65		1.72	10.80		0.73			
★CE-12.7	12.7	11.07		15.24	0.90		1.77	11.42		1.00	+0.07 -0		
★CE-14	14	12.23	+0.10 -0.15	16.80	0.90		1.88	12.59		1.00			
★CE-15	15	13.13		17.92	0.90		1.95	13.49		1.00			
CE-16	16	14.02		19.04	0.90		2.04	14.40		1.00			
★CE-18	18	15.80		21.30	1.00		2.20	16.20	±0.07	1.10			
★CE-20	20	17.58	+0.12 -0.17	23.50	1.00		2.40	18.00		1.10			
CE-22	22	19.40		25.80	1.00		2.62	19.80		1.10			
CE-24	24	21.20		28.06	1.00	±0.05	2.87	21.61		1.10			
CE-25.4	25.4	22.44		29.21	1.00		3.05	22.86		1.10			
(CE-26)	26	23.00		30.32	1.30		3.11	23.41		1.45			
CE-28	28	24.80		32.60	1.30		3.35	25.20		1.45			
CE-30	30	26.54		34.80	1.30		3.60	27.00		1.45			
CE-32	32	28.34	+0.15 -0.20	37.04	1.30		3.84	28.85	±0.10	1.45	+0.10 -0		
(CE-34)	34	30.14		39.38	1.30		4.10	30.60		1.45			
(CE-36)	36	31.94		41.70	1.30		4.33	32.40		1.45			
CE-38	38	33.68		43.63	1.30		4.54	34.24		1.45			
CE-40	40	35.46	+0.17 -0.22	45.86	1.60	±0.08	4.78	36.04	±0.12	1.75			
(CE-42)	42	37.42		48.06	1.60		5.02	37.84		1.75			

標準材質は、SK85M又はSK85(黒染め)です。その他は受注生産となります。

(注) ★印は、ステンレス製品(SUS304)もお取扱いございます。

(注) ※印は、リングパック品もお取扱いございます。

(注) ()は、在庫無くなり次第、販売終了となります。