


I.W.T. 規格 G型リング (軸用)

I.W.T. Standard External Ring G-type



イワタ RING
磐田 電工

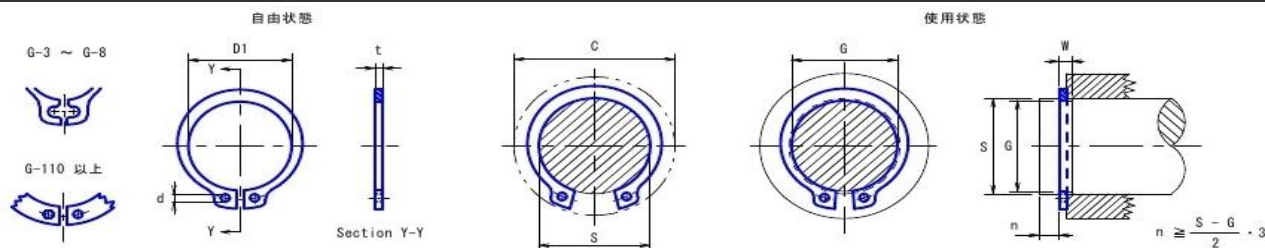

単位 mm

呼び Ring No.	軸径 Shaft dia S	リング寸法 I.W.T. RING DIMENSIONS					溝寸法 GROOVE DIMENSIONS				挿入直径 When sprung Over Shaft C
		内径 Inside dia D1		板厚 Thickness t		孔径 Hole dia d	溝径 Groove dia G		溝巾 Groove width W		
		公差	公差	公差	公差	公差	公差				
★G-3	3	2.6		0.25	±0.02	0.8	2.7		0.30		6.3
★G-4	4	3.6	+0.05 -0.10	0.25		0.8	3.7	±0.03	0.30		8.1
★G-5	5	4.6		0.40		0.8	4.7		0.45		9.1
★G-6	6	5.5		0.40		0.8	5.7		0.45		10.8
★G-7	7	6.4		0.65		1.0	6.7		0.73	+0.05 -0.00	13.0
★G-8	8	7.4		0.65	±0.03	1.0	7.7		0.73		14.0
★G-9	9	8.2		0.65		1.0	8.4		0.73		14.2
G-10	10	9.0		0.65		1.0	9.4		0.73		15.2
★G-11	11	10.0	+0.05 -0.12	0.65		1.0	10.3	±0.05	0.73		16.1
G-12	12	11.0		0.65		1.2	11.3		0.73		17.2
G-13	13	12.0		0.90		1.2	12.3		1.00		19.3
G-14	14	13.0		0.90		1.2	13.3		1.00		20.3
G-15	15	13.9		0.90		1.2	14.3		1.00		21.3
G-16	16	14.8		0.90		1.2	15.3		1.00		22.6
G-17	17	15.7		0.90		1.6	16.2		1.00		23.6
G-18	18	16.7		1.00		1.6	17.2		1.10		26.1
G-19	19	17.6		1.00	±0.05	1.6	18.2		1.10	+0.08 -0.00	27.2
G-20	20	18.5		1.00		1.6	19.1		1.10		28.2
G-22	22	20.4	+0.10 -0.25	1.00		1.6	21.0	±0.07	1.10		30.0
G-25	25	23.1		1.00		1.6	23.9		1.10		35.6
G-28	28	25.9		1.40		2.6	26.8		1.55		39.9
G-30	30	27.8		1.40		2.6	28.6		1.55		41.8
G-32	32	29.6		1.40		2.6	30.6		1.55		43.8
G-35	35	32.4		1.40		2.6	33.4		1.55		47.0
G-38	38	35.2	+0.25 -0.35	1.40		3.2	36.3	±0.10	1.55		52.5
G-40	40	37.0		1.60		3.2	38.2		1.75		54.6
G-45	45	41.7		1.60		3.2	43.0		1.75		59.7
G-50	50	46.2		1.60		3.2	47.8		1.75		64.9
G-55	55	50.9		2.00		3.2	52.5		2.20		72.0
G-60	60	55.6		2.00		3.2	57.3		2.20		77.0
G-65	65	60.2	+0.50 -0.60	2.00		3.2	62.1	±0.25	2.20		81.0
G-70	70	64.8		2.30		2.5	66.8		2.55		88.0
G-75	75	69.4		2.30		3.2	71.6		2.55		93.0
G-80	80	74.1		2.30		3.2	76.4		2.55		98.0
G-85	85	78.7	+0.50 -0.70	2.30	±0.07	3.2	81.2	±0.35	2.55	+0.10 -0.00	103.0
G-90	90	83.3		2.90		3.2	86.0		3.18		109.0
G-95	95	87.9		2.90		3.0	90.7		3.18		115.0
G-100	100	92.6		2.90		3.2	95.6		3.18		120.0
G-105	105	97.2		2.90		3.2	100.0		3.18		127.0
G-110	110	101.7		2.90		3.2	105.0		3.18		133.0
G-120	120	111.6	+0.50 -0.80	2.90		3.2	114.5	±0.40	3.18		145.0
G-130	130	122.2		2.90		4.0	125.0		3.18		157.0
G-140	140	131.1		3.20		4.0	133.7		3.50		169.0
G-150	150	142.0		3.20		4.0	146.0		3.50		182.0

標準材質は、SK85M又はSK85(黒染め)です。その他は受注生産となります。
(注) ★印は、ステンレス製品(SUS304)もお取扱いございます。