


JIS規格 C型リング (軸用)

JIS External Ring C-type



イワタ RING
磐田電工

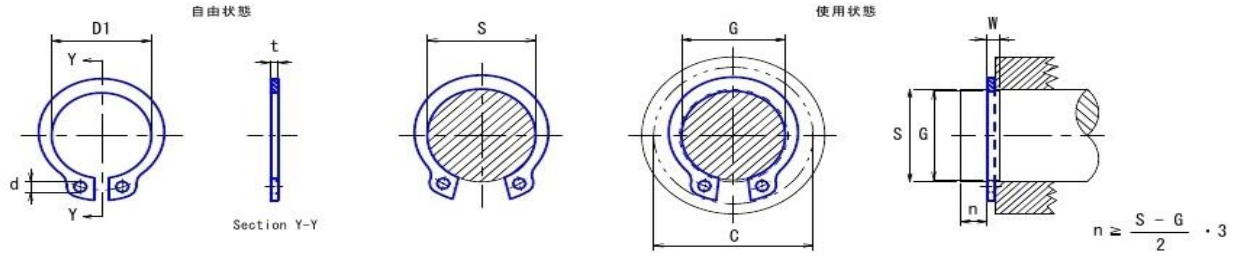

単位 mm

呼び Ring No.	軸径 Shaft dia S	リング寸法 JIS RING DIMENSIONS					溝寸法 GROOVE DIMENSIONS					挿入直径 When sprung Over Shaft C
		内径 Inside dia		板厚 Thickness		最小孔径 Hole dia	溝径 Groove dia		溝巾 Groove width			
		D1	公差	t	公差	d	G	公差	W	公差		
JG-10	10	9.3	±0.15	1.00	±0.04	1.5	9.6	+0, -0.09	1.15	+0.14 -0	17	
JG-11	11	10.2		1.00		1.5	10.5	1.15	18			
JG-12	12	11.1		1.00		1.7	11.5	1.15	19			
JG-13	13	12.0		1.00		1.7	12.4	1.15	20			
JG-14	14	12.9		1.00		1.7	13.4	1.15	22			
JG-15	15	13.8	±0.18	1.00	±0.05	1.7	14.3	+0 -0.11	1.15	23		
JG-16	16	14.7		1.00		1.7	15.2	1.15	24			
JG-17	17	15.7		1.00		1.7	16.2	1.15	25			
JG-18	18	16.5		1.20		1.7	17.0	1.35	26			
JG-19	19	17.5		1.20		2.0	18.0	1.35	27			
JG-20	20	18.5	±0.2	1.20	±0.06	2.0	19.0	+0 -0.21	1.35	28		
JG-21	21	19.5		1.20		2.0	20.0		1.35	30		
JG-22	22	20.5		1.20		2.0	21.0		1.35	31		
JG-24	24	22.2		1.20		2.0	22.9		1.35	33		
JG-25	25	23.2		1.20		2.0	23.9		1.35	34		
JG-28	28	25.9	±0.25	1.50	±0.07	2.0	26.6	+0 -0.25	1.65	38		
JG-29	29	26.9		1.50		2.0	27.6		1.65	39		
JG-30	30	27.9		1.50		2.0	28.6		1.66	40		
JG-32	32	29.6		1.50		2.5	30.3		1.65	43		
JG-34	34	31.5		1.50		2.5	32.3		1.65	45		
JG-35	35	32.2	1.50	2.5	33.0	1.65	46					
JG-36	36	33.2	1.75	2.5	34.0	1.90	47					
JG-38	38	35.2	1.75	2.5	36.0	1.90	50					
JG-40	40	37.0	1.75	2.5	38.0	1.90	53					
JG-42	42	38.5	±0.4	1.75	±0.08	2.5	39.5	+0 -0.3	1.90	55		
JG-45	45	41.5		1.75		2.5	42.5		1.90	58		
JG-48	48	44.5		1.75		2.5	45.5		1.90	62		
JG-50	50	45.8		2.00		2.5	47.0		2.20	64		
JG-52	52	47.8		2.00		2.5	49.0		2.20	66		
JG-56	56	51.8	±0.45	2.00	±0.09	2.5	53.0	+0 -0.35	2.20	71		
JG-60	60	55.8		2.00		2.5	57.0		2.20	75		
JG-65	65	60.8		2.50		2.5	62.0		2.70	81		
JG-70	70	65.5		2.50		2.5	67.0		2.70	86		
(JG-72)	72	67.5		2.50		2.5	69.0		2.70	88		
JG-75	75	70.5	±0.55	2.50	±0.10	2.5	72.0	+0 -0.54	2.70	92		
JG-78	78	73.5		2.50		2.5	75.0		2.70	95		
JG-80	80	74.5		2.50		2.5	76.5		2.70	97		
JG-85	85	79.5		3.00		3.0	81.5		3.20	103		
JG-90	90	84.5		3.00		3.0	86.5		3.20	108		
JG-95	95	89.5	±0.07	3.00	±0.11	3.0	91.5	+0.18 -0	3.20	114		
JG-100	100	94.5		3.00		3.0	96.5		3.20	119		
JG-105	105	98.0		4.00		3.0	101.0		4.20	125		
JG-110	110	103.0		4.00		3.0	106.0		4.20	131		
JG-115	115	108.0		4.00		3.0	111.0		4.20	137		
JG-120	120	113.0	±0.54	4.00	±0.12	3.0	116.0	+0 -0.63	4.20	143		
JG-125	125	118.0		4.00		3.5	121.0		4.20	148		

標準材質は、SK85M又はSK85(黒染め)、ステンレス(SUS304)です。その他は受注生産となります。

(注) (JG-72)は、在庫無くなり次第、販売終了となります。

(注) 注文書を作成する場合、JIS B 2804 C型止メ輪は軸用、穴用の両方がありますので「JG-〇〇」と記入して下さい。