


# I.W.T. 規格 CE型リング (軸用)

I.W.T. Standard External Ring CE-type



イワタ RING  
磐田 電 工

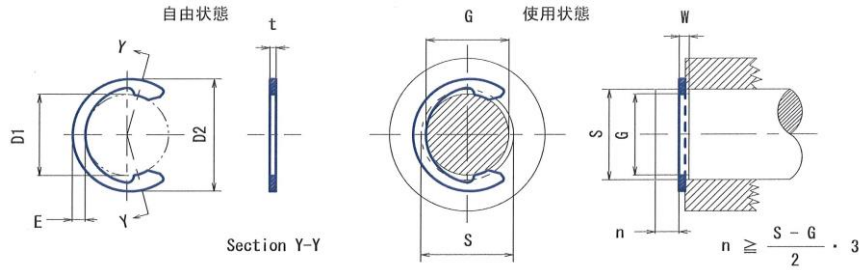

単位 mm

呼び Ring No.	軸径 Shaft dia S	リング寸法 I.W.T. RING DIMENSIONS					溝寸法 GROOVE DIMENSIONS					許容スラスト 荷重(リング) 安全率=4 Allow Thrust Load SK85M 又はSK85 [N]		
		内径 Inside dia		外径 Outside dia		板厚 Thickness		最大巾 Ring Width		溝径 Groove dia			溝巾 Groove width	
		D1	公差	D2	t	公差	E	G	公差	W	公差			
CE-3 ※	3	2.41	+0.05 -0.10	4.45	0.40	±0.03	0.80	2.48	±0.03	0.45	+0.05 -0	383		
CE-4 ※	4	3.31		5.52	0.40		0.83	3.43		0.45		510		
CE-5 ※	5	4.20	+0.07 -0.12	6.65	0.40	±0.04	1.03	4.37	±0.05	0.45	+0.07 -0	638		
CE-6 ※	6	5.09		7.72	0.65		1.15	5.30		0.73		1,256		
CE-7 ※	7	5.98	+0.10 -0.15	8.90	0.65	±0.05	1.25	6.21	±0.07	0.73	+0.10 -0	1,472		
CE-8 ※	8	6.87		10.00	0.65		1.34	7.13		0.73		1,668		
CE-9	9	7.77	+0.12 -0.17	11.12	0.65	±0.08	1.43	8.05	±0.10	0.73	+0.12 -0	1,864		
CE-10	10	8.66		12.30	0.65		1.53	8.97		0.73		2,099		
CE-11	11	9.55	+0.15 -0.20	13.42	0.65	±0.10	1.62	9.88	±0.12	0.73	+0.15 -0	2,305		
CE-12	12	10.45		14.54	0.65		1.72	10.80		0.73		2,521		
CE-12.7	12.7	11.07	+0.17 -0.22	15.24	0.90	±0.05	1.77	11.42	±0.07	1.00	+0.17 -0	3,689		
CE-14	14	12.23		16.80	0.90		1.88	12.59		1.00		4,071		
CE-15	15	13.13	+0.12 -0.17	17.92	0.90	±0.05	1.95	13.49	±0.10	1.00	+0.12 -0	4,365		
CE-16	16	14.02		19.04	0.90		2.04	14.40		1.00		4,650		
CE-18	18	15.80	+0.15 -0.20	21.30	1.00	±0.05	2.20	16.20	±0.07	1.10	+0.15 -0	7,259		
CE-20	20	17.58		23.50	1.00		2.40	18.00		1.10		8,083		
CE-22	22	19.40	+0.17 -0.22	25.80	1.00	±0.08	2.62	19.80	±0.10	1.10	+0.17 -0	8,829		
CE-24	24	21.20		28.06	1.00		2.87	21.61		1.10		9,614		
CE-25.4	25.4	22.44	+0.15 -0.20	29.21	1.00	±0.08	3.05	22.86	±0.12	1.10	+0.15 -0	9,810		
CE-26	26	23.00		30.32	1.30		3.11	23.41		1.45		12,753		
CE-28	28	24.80	+0.17 -0.22	32.60	1.30	±0.08	3.35	25.20	±0.10	1.45	+0.17 -0	14,715		
CE-30	30	26.54		34.80	1.30		3.60	27.00		1.45		15,696		
CE-32	32	28.34	+0.17 -0.22	37.04	1.30	±0.08	3.84	28.85	±0.12	1.45	+0.17 -0	16,677		
CE-36	36	31.94		41.70	1.30		4.33	32.40		1.45		18,639		
CE-38	38	33.68	+0.17 -0.22	43.63	1.30	±0.08	4.54	34.24	±0.12	1.45	+0.17 -0	19,620		
CE-40	40	35.46		45.86	1.60		4.78	36.04		1.75		25,506		
CE-45	45	39.92	+0.17 -0.22	51.46	1.60	±0.08	5.37	40.54	±0.12	1.75	+0.17 -0	28,449		

上記規格表に明示されている許容スラスト荷重は、各スナップリング(安全率=4)PR で、実際の締結許容スラスト荷重は、使用軸材質によりテストを行ってください。  
※印リングはイワタ”ディスペンサー”用に”リングパック”®されたものが標準です。